

Generator Set Data Sheet	Model: C825 D5E Frequency: 50 Fuel Type: Diesel
---------------------------------	--

Document Number:	DS37-cpgk-RevA
Spec Sheet:	SS14-CPGK
Noise Data Sheet (Open / Enclosed):	ND50-OSHHP / ND50-CS550
Airflow Data Sheet:	AF50-HHP
Derate Data Sheet (Open / Enclosed):	DD50-OSHHP / DD50-CSHHP
Transient Data Sheet:	TD50-HHP

Fuel Consumption	Standby				Prime			
	kW (kVA)				kW (kVA)			
Ratings	660 (825)				600 (750)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	10.9	19.6	30.0	40.9	11.4	20.9	29.0	36.9
L/hr	50	89	136	186	52	95	132	168

Engine	Standby Rating	Prime Rating
Engine Manufacturer	Cummins	
Engine Model	KTA38-G7	
Configuration	Cast Iron, 60° V12 Cylinder	
Aspiration	Turbo Charged and After-Cooled	
Gross Engine Power Output, kWm	895	806
BMEP at Set Rated Load, kPa	1896	1710
Bore, mm	159	
Stroke, mm	159	
Rated Speed, rpm	1500	
Piston Speed, m/s	7.9	
Compression Ratio	16.7:1	
Lube Oil Capacity, L	155	
Overspeed Limit, rpm	1850 ±50	
Regenerative Power, kW	86	
Governor Type	Electronic	
Starting Voltage	24 Volts DC	
Fuel Flow		
Maximum Fuel Flow, L/hr	454	
Maximum Fuel Inlet Restriction, mm Hg	203	
Maximum Fuel Inlet Temperature (°C)	70	
Air		
Combustion Air, m³/min	71.3	67.7
Maximum Air Cleaner Restriction, kPa	6.2	
Exhaust		
Exhaust Gas Flow at Set Rated Load, m³/min	176	165.2
Exhaust Gas Temperature, °C	486	480
Maximum Exhaust Back Pressure, kPa	6.8	

Standard Set-Mounted Radiator Cooling	Standby Rating	Prime Rating
Ambient Design, °C	40	
Fan Load, KW _m	31	
Coolant Capacity (with Radiator), L	464	
Cooling System Air Flow, m3/min @ 12.7mmH2O	23.4	
Total Heat Rejection, BTU/min	35000	30690
Maximum Cooling Air Flow Static Restriction mmH2O	19.1	

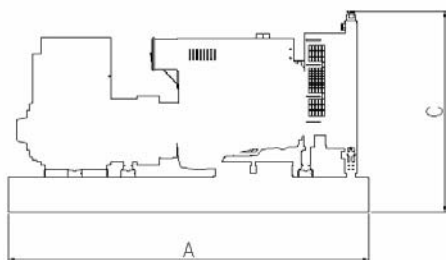

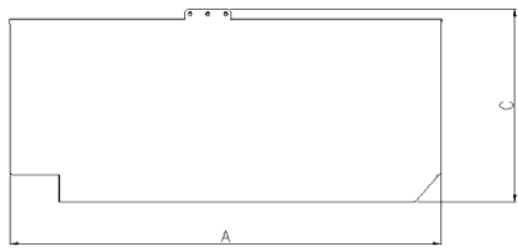
Open Set Derating Factors Kw (kVA).

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CSHHP.

	27°C	40°C	45°C	50°C	55°C
Standby	660 (825)	660 (825)	RTF	RTF	RTF
Prime	600 (750)	600 (750)	RTF	RTF	RTF

Weights*	Open	Enclosed
Unit Dry Weight kgs	8350	N/A
Unit Wet Weight kgs	9425	N/A

* Weights represent a set with standard features. See outline drawing for weights of other configurations

Dimensions			
	Length	Width	Height
Standard open set dimensions	4375	2033	2856
Enclosed set standard dimensions	N/A	N/A	N/A
Outline <u>Open Set</u>   <u>Enclosed Set</u>  			

*Note: Outlines are for illustrative purposes only. Please refer to the genset outline drawing for exact representation of this model.

Our energy working for you.™

www.cumminspower.com

© 2004-2006 | Cummins Power Generation | Specifications Subject to Change Without Notice

Cummins and PowerCommand are registered trademarks of Cummins Inc. AmpSentry is a trademark of Cummins Inc.

Alternator Data					
Feature Code	Connection ¹	Temp Rise Degrees C	Duty ²	Alternator	Voltage
B613	Wye, 3 Phase	163	S	HC6G	380-440V
B668	Wye, 3 Phase	125/105	S/P	HC6H	380-440V

Notes:

Ratings Definitions		
Standby:	Prime (Unlimited Running Time):	Base Load (Continuous):
Applicable for supplying emergency power for the duration of normal power interruption. No sustained overload capability is available for this rating. This rating is applicable to installations served by a reliable normal utility source. This rating is only applicable to variable loads with an average load factor of 80 percent of the standby rating for a maximum of 200 hours of operation per year and a maximum of 25 hours per year at 100% of its standby rating. The standby rating is only applicable to emergency and standby applications where the generator set serves as the back up to the normal utility source. No sustained utility parallel operation is permitted with this rating. (Equivalent to Fuel Stop Power in accordance with ISO3046, AS2789, DIN6271 and BS5514). Nominally Rated.	Applicable for supplying power in lieu of commercially purchased power. Prime power is the maximum power available at a variable load for an unlimited number of hours. A 10% overload capability is available for limited time. (Equivalent to Prime Power in accordance with ISO8528 and Overload Power in accordance with ISO3046, AS2789, DIN6271, and BS5514). This rating is not applicable to all generator set models.	Applicable for supplying power continuously to a constant load up to the full output rating for unlimited hours. No sustained overload capability is available for this rating. Consult authorized distributor for rating. (Equivalent to Continuous Power in accordance with ISO8528, ISO3046, AS2789, DIN6271, and BS5514). This rating is not applicable to all generator set models.

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the Single Phase Factor³. All single phase ratings are at unity power factor.
- Standby (S), Prime (P) and (C) Continuous ratings.
- Factor for the *Single Phase Output from Three Phase Alternator* formula listed below
- Maximum rated starting kVA that results in a minimum of 90% of rated sustained voltage during starting.

Formulas for calculating full load currents:

Three Phase Output	Single Phase Output
$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$	$\frac{\text{kW} \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-Mail: cpg.uk@cummins.com
 Web: www.cumminspower.com

Cummins and PowerCommand are registered trademarks of Cummins Inc. AmpSentry is a trademark of Cummins Inc.

Our energy working for you.™

www.cumminspower.com

© 2004-2006 | Cummins Power Generation | Specifications Subject to Change Without Notice

Cummins and PowerCommand are registered trademarks of Cummins Inc. AmpSentry is a trademark of Cummins Inc.